

STEALTH[®]
THE TOOL YOU'LL BE GLAD YOU HAVE

STEALTH[®]
THE TOOL YOU'LL BE GLAD YOU HAVE

China Factory:
Suzhou Alton Electrical & Mechanical Industry Co., Ltd.
North Linhu Road, East Laixiu Road,
Wujiang Foho Economic Development Zone,
Jiangsu, P.R.C 215211
Tel: 86-512-82876660
Fax: 86-512-82876895

US Headquarter:
Alton Industry Ltd. Group
643 Innovation Drive West Chicago, IL 60185
E-Mail: info@altonindustries.com



AIR COMPRESSOR

www.stealthcompressors.com

STEALTH®

STEALTH Air Compressors bring innovation, modern technology and reliability to a new level. With a focus on quiet operation and high pressure performance, the STEALTH line provides a variety of high quality air compressors for any job.

5 REASONS TO CHOOSE STEALTH AIR COMPRESSOR



OIL-FREE AIR COMPRESSOR

Energy Efficient
-Lower draw means higher energy efficiency



QUIET PUMP AND MOTOR

-Hearing safety
-Workplace / Environment safety
-Reduced noise pollution



EXTENDED LIFETIME

-3X Longer motor life than standard air compressors with induction motors
-Low to no maintenance



HIGH PRESSURE

-Longer unit life
-Compressor remains stable



LIMITED LIFETIME WARRANTY

-On pump and motor

* Tank capacity refers to actual tank volume and does not reflect capacity available during operation.

** Horsepower and air delivery value measured in accordance with ISO1217.

*** Maximum air pressure before shut off.

**** According to ISO 3744.

WHEN POWERFUL MEETS QUIET

Inflation




Auto Mechanic



Worksite





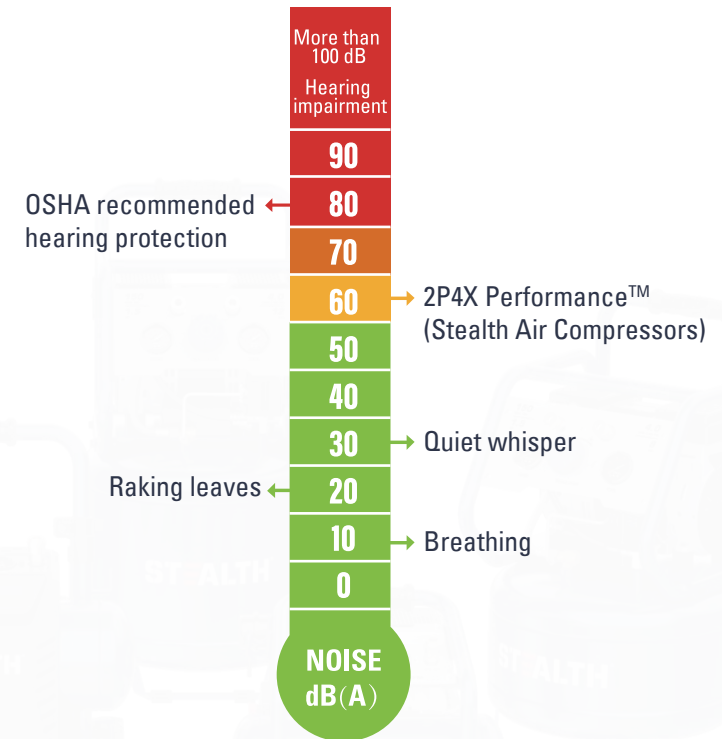

















Workshop



2P4X Performance™
Pump and Induction Motor Technology
• Quieter Operation



AIR COMPRESSOR COMPARISON CHART

| CATEGORY | CFM @90PSI | TOOL | Legend | | | | | | | | | |
|---|------------|---|---------------------------------------|--|---|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | | | <input type="checkbox"/> Continuously | <input checked="" type="checkbox"/> Intermittently | <input checked="" type="checkbox"/> Not recommended | | | | | | | |
|  INFLATION | 0.3-2.4 |  Inflation/ Recreation (cleaning) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| | |  Brad Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | |  Framing Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | |  Impact Wrenches | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|  AUTO MECHANIC | 2.5-3.9 |  Inflation/ Recreation (cleaning) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| | |  Brad Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| | |  Framing Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| | |  Impact Wrenches | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
|  WORKSITE | 4.0-5.0 |  Inflation/ Recreation (cleaning) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| | |  Brad Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| | |  Framing Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| | |  Impact Wrenches | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
|  WORKSHOP | > 5.1 |  Inflation/ Recreation (cleaning) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| | |  Brad Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| | |  Framing Nailer | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |
| | |  Impact Wrenches | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | |

AIR COMPRESSORS

FINISH TRIM SERIES

HIGH PORTABILITY FOR RENOVATION WORK.

SAQ-1234



CORD WRAP DESIGN
For cord storage.

LARGE REGULATOR
For easy operation.

STRONG HANDLE WITH RUBBER GRIP
For easy carrying.


INTEGRATED CONTROL PANEL
For easy operation.

QUIET OPERATION WITH NOISE
Less than 60dB(A).

DUAL GAUGES
Indicate tank and tool pressure for easy monitoring.

ONE QUICK COUPLER
For universal use.

POWERFUL OIL-FREE MOTOR
Requires less maintenance.

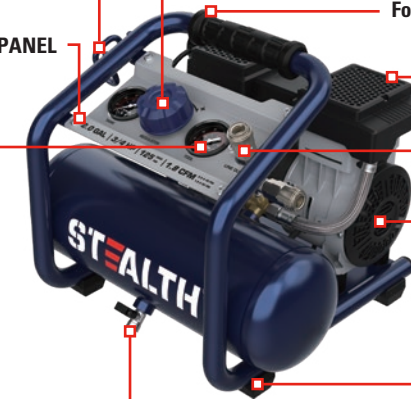

AIR TANK DRAIN VALVE
For removing moisture from the air tank.

RUBBER FEET
To reduce vibration and increase stability.

SAUQ-1105



LARGE REGULATOR
For easy operation.

STRONG HANDLE WITH RUBBER GRIP
For easy carrying.

INTEGRATED CONTROL PANEL
For easy operation.

QUIET OPERATION WITH NOISE
Less than 60dB(A).

DUAL GAUGES
Indicate tank and tool pressure for easy monitoring.


ONE QUICK COUPLER
For universal use.

POWERFUL OIL-FREE MOTOR
Requires less maintenance.

CORD WRAP DESIGN
For cord storage

RUBBER FEET
To reduce vibration and increase stability.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.

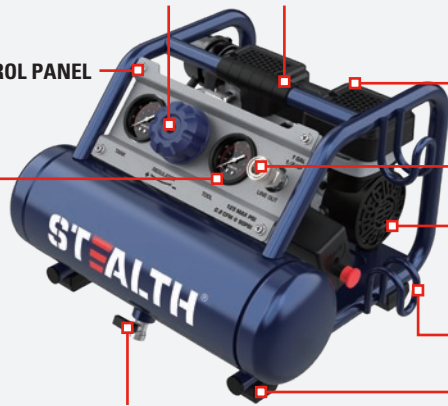

| Model | SAUQ-1105 | SAQ-1234 |
|-------------------------|--------------------|--------------------|
| Voltage | 120V | 120V |
| Frequency | 60Hz | 60Hz |
| Tank size (Gal.)* | 1 | 2 |
| Running HP** | 1/2 | 3/4 |
| Pressure MAX. (PSI)*** | 125 | 125 |
| CFM@90 PSI** | 0.8 | 1.8 |
| CFM@40 PSI** | 1.3 | 2.8 |
| Quick coupler | 1 | 1 |
| Power cord length (ft.) | 6 | 6 |
| Noise level (2m)**** | < 60 dB(A) | < 60 dB(A) |
| Life cycle (Hrs) | 1000 | 1000 |
| Unit size (in.) | 16.3 x 14.3 x 11.2 | 16.3 x 14.6 x 13.8 |
| Net weight (lbs) | 26.38 | 41.5 |
| Motor type | Induction | Induction |

AIR COMPRESSORS

WORKSITE SERIES

HIGH AIR FLOW FOR BETTER EFFICIENCY.

SAQ-1301

LARGE REGULATOR
For easy operation.

STRONG HANDLE WITH RUBBER GRIP
For easy carrying.

INTEGRATED CONTROL PANEL
For easy operation.

DUAL GAUGES
Indicate tank and tool pressure for easy monitoring.

QUIET OPERATION WITH NOISE
Less than 65dB(A).

ONE QUICK COUPLER
For universal use.

POWERFUL OIL-FREE MOTOR
Requires less maintenance.

RUBBER FEET
To reduce vibration and increase stability.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.

UP TO 80% QUIETER AND 3X LONGER LIFE
STALTH INNOVATIVE QUIET SYSTEM AIR COMPRESSORS HAVE BEEN TESTED TO BE UP TO 80% QUIETER AND QUALITY TO 3X LONGER MOTOR LIFE THAN STANDARD INDUCTION MOTORS.

INNOVATIVE QUIET SYSTEM

80% QUIETER AND 3X LONGER LIFE

UP TO 80% QUIETER AND 3X LONGER LIFE

STALTH INNOVATIVE QUIET SYSTEM AIR COMPRESSORS HAVE BEEN TESTED TO BE UP TO 80% QUIETER AND QUALITY TO 3X LONGER MOTOR LIFE THAN STANDARD INDUCTION MOTORS.

LIMITED LIFETIME WARRANTY

SAQ-1318

CORD WRAP DESIGN
For cord storage.

DUAL GAUGES
Indicate tank and tool pressure for easy monitoring.

STRONG HANDLE WITH RUBBER GRIP
For easy carrying.

QUIET OPERATION WITH NOISE
Less than 70dB(A).

LARGE REGULATOR
For easy operation.

ONE QUICK COUPLER
For universal use.

POWERFUL OIL-FREE MOTOR
Requires less maintenance.

RUBBER FEET
To reduce vibration and increase stability.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.

UP TO 80% QUIETER AND 3X LONGER LIFE
STALTH INNOVATIVE QUIET SYSTEM AIR COMPRESSORS HAVE BEEN TESTED TO BE UP TO 80% QUIETER AND QUALITY TO 3X LONGER MOTOR LIFE THAN STANDARD INDUCTION MOTORS.

INNOVATIVE QUIET SYSTEM

80% QUIETER AND 3X LONGER LIFE

UP TO 80% QUIETER AND 3X LONGER LIFE

STALTH INNOVATIVE QUIET SYSTEM AIR COMPRESSORS HAVE BEEN TESTED TO BE UP TO 80% QUIETER AND QUALITY TO 3X LONGER MOTOR LIFE THAN STANDARD INDUCTION MOTORS.

LIMITED LIFETIME WARRANTY

| Model | SAQ-1301 | SAQ-1318 |
|-------------------------|------------------|---------------------|
| Voltage | 120V | 120V |
| Frequency | 60Hz | 60Hz |
| Tank size (Gal.)* | 3 | 3 |
| Running HP** | 1 | 1.8 |
| Pressure MAX. (PSI)*** | 150 | 150 |
| CFM@90 PSI** | 2.5 | 4.5 |
| CFM@40 PSI** | 3.5 | 5.5 |
| Quick coupler | 1 | 1 |
| Power cord length (ft.) | 6 | 6 |
| Noise level (2m)**** | < 65 dB(A) | < 70 dB(A) |
| Life cycle (Hrs) | 1000 | 1000 |
| Unit size (in.) | 19 x 17.7 x 13.3 | 19.91 x 18.9 x 13.8 |
| Net weight (lbs) | 47.5 | 62.8 |
| Motor type | Induction | Induction |

SAQ-1413



SAQ-1815



| Model | SAQ-1413 | | |
|------------------------|----------|-------------------------|----------------------|
| Voltage | 120V | Quick coupler | 1 |
| Frequency | 60Hz | Power cord length (ft.) | 6 |
| Tank size (Gal.)* | 4.5 | Noise level (2m)**** | < 65 dB(A) |
| Running HP** | 1.3 | Life cycle (Hrs) | 1000 |
| Pressure MAX. (PSI)*** | 150 | Unit size (in.) | 15.94 x 18.3 x 20.98 |
| CFM@90 PSI** | 3 | Net weight (lbs) | 64.5 |
| CFM@40 PSI** | 4 | Motor type | Induction |

| Model | SAQ-1815 | | |
|------------------------|----------|-------------------------|--------------------|
| Voltage | 120V | Quick coupler | 2 |
| Frequency | 60Hz | Power cord length (ft.) | 6 |
| Tank size (Gal.)* | 8 | Noise level (2m)**** | < 70 dB(A) |
| Running HP** | 1.5 | Life cycle (Hrs) | 1000 |
| Pressure MAX. (PSI)*** | 150 | Unit size (in.) | 19.7 x 17.5 x 23.8 |
| CFM@90 PSI** | 4 | Net weight (lbs) | 83.8 |
| CFM@40 PSI** | 5 | Motor type | Induction |



WORKSHOP SERIES

LARGE CAPACITY FOR LONGER WORKING TIME.

AIR COMPRESSORS

SAQ-11018

INNOVATIVE QUIET SYSTEM

UP TO **80% QUIETER** AND **3X LONGER LIFE**

STEALTH INNOVATIVE QUIET SYSTEM AIR COMPRESSORS HAVE BEEN TESTED TO BE UP TO 80% QUIETER AND QUALITY TO 3 TIMES LONGER MOTOR LIFE THAN STANDARD INDUCTION MOTORS.

LARGE REGULATOR
For easy operation.

DUAL GAUGES
Indicate tank and tool pressure for easy monitoring.

INTEGRATED CONTROL PANEL
For easy operation.

ADJUSTABLE RUBBER HANDLE
For easy operation and storage.

DUAL QUICK COUPLERS
To work simultaneously.

QUIET OPERATION WITH NOISE
Less than 70dB(A).

POWERFUL OIL-FREE MOTOR
Requires less maintenance.



RUBBER WHEELS
For easy transport.

RUBBER FEET
To reduce vibration and increase stability.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.

| Model | SAQ-11018 | | |
|------------------------|-----------|-------------------------|--------------------|
| Voltage | 120V | Quick coupler | 2 |
| Frequency | 60Hz | Power cord length (ft.) | 6 |
| Tank size (Gal.)* | 10 | Noise level (2m)**** | < 70 dB(A) |
| Running HP** | 1.8 | Life cycle (Hrs) | 1000 |
| Pressure MAX. (PSI)*** | 150 | Unit size (in.) | 19.7 x 17.5 x 26.1 |
| CFM@90 PSI** | 5 | Net weight (lbs) | 90.4 |
| CFM@40 PSI** | 5.5 | Motor type | Induction |

SAQ-11215

LARGE REGULATOR
For easy operation.

DUAL GAUGES
Indicate tank and tool pressure for easy monitoring.

INTEGRATED CONTROL PANEL
For easy operation.



INNOVATIVE QUIET SYSTEM
UP TO **80% QUIETER** AND **3X LONGER LIFE**
STEALTH INNOVATIVE QUIET SYSTEM AIR COMPRESSORS HAVE BEEN TESTED TO BE UP TO 80% QUIETER AND QUALITY TO 3 TIMES LONGER MOTOR LIFE THAN STANDARD INDUCTION MOTORS.



ADJUSTABLE RUBBER HANDLE
For easy operation and storage.

DUAL QUICK COUPLERS
To work simultaneously.

QUIET OPERATION WITH NOISE
Less than 70dB(A).

POWERFUL OIL-FREE MOTOR
Requires less maintenance.

RUBBER WHEELS
For easy transport.

RUBBER FEET
To reduce vibration and increase stability.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.

| Model | | SAQ-11215 | |
|------------------------|------|-------------------------|--------------------|
| Voltage | 120V | Quick coupler | 2 |
| Frequency | 60Hz | Power cord length (ft.) | 6 |
| Tank size (Gal.)* | 12 | Noise level (2m)**** | < 70 dB(A) |
| Running HP** | 1.5 | Life cycle (Hrs) | 1000 |
| Pressure MAX. (PSI)*** | 150 | Unit size (in.) | 19.7 x 17.5 x 28.5 |
| CFM@90 PSI** | 4 | Net weight (lbs) | 89.4 |
| CFM@40 PSI** | 5 | Motor type | Induction |

SAQ-12018

STRONG HANDLE WITH RUBBER GRIP
For easy carrying.

QUIET OPERATION WITH NOISE
Less than 70dB(A).

INTEGRATED CONTROL PANEL
For easy operation.

LARGE REGULATOR
For easy operation.

RUBBER WHEELS
For easy transport.



INNOVATIVE QUIET SYSTEM
UP TO **80% QUIETER** AND **3X LONGER LIFE**
STEALTH INNOVATIVE QUIET SYSTEM AIR COMPRESSORS HAVE BEEN TESTED TO BE UP TO 80% QUIETER AND QUALITY TO 3 TIMES LONGER MOTOR LIFE THAN STANDARD INDUCTION MOTORS.



DUAL QUICK COUPLERS
To work simultaneously.

POWERFUL OIL-FREE MOTOR
Requires less maintenance.

DUAL GAUGES
Indicate tank and tool pressure for easy monitoring.

RUBBER FEET
To reduce vibration and increase stability.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.

| Model | | SAQ-12018 | |
|------------------------|------|-------------------------|--------------------|
| Voltage | 120V | Quick coupler | 2 |
| Frequency | 60Hz | Power cord length (ft.) | 6 |
| Tank size (Gal.)* | 20 | Noise level (2m)**** | < 70 dB(A) |
| Running HP** | 1.8 | Life cycle (Hrs) | 1000 |
| Pressure MAX. (PSI)*** | 150 | Unit size (in.) | 19.7 x 17.5 x 41.8 |
| CFM@90 PSI** | 5 | Net weight (lbs) | 113.2 |
| CFM@40 PSI** | 5.5 | Motor type | Induction |

3301072

175
MAX PSI

DUAL GAUGES
indicate tank and tool
pressure for easy monitoring.

LARGE REGULATOR
For easy operation.

QUIET OPERATION WITH NOISE
Less than 70dB(A).

**POWERFUL OIL-FREE
MOTOR**
Requires less
maintenance.

**INTEGRATED CONTROL
PANEL**
For easy operation.

ONE QUICK COUPLER
For universal use.

RUBBER FEET
To reduce vibration and increase stability.

RUBBER WHEELS
For easy transport.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.



| Model | 3301072 | | |
|------------------------|---------|-------------------------|--------------------|
| Voltage | 120V | Quick coupler | 1 |
| Frequency | 60Hz | Power cord length (ft.) | 6 |
| Tank size (Gal.)* | 10 | Noise level (2m)**** | < 70 dB(A) |
| Running HP** | 1.8 | Life cycle (Hrs) | 1000 |
| Pressure MAX. (PSI)*** | 175 | Unit size (in.) | 30.5 x 12.8 x 24.3 |
| CFM@90 PSI** | 4.5 | Net weight (lbs) | 80.5 |
| CFM@40 PSI** | 5.5 | Motor type | Induction |

SAA-110T

225
MAX PSI
PORTABLE AIR TANK

FIXED HANDLE WITH RUBBER GRIP
For easy transport.

DUAL GAUGES
Indicate tank and tool
pressure for easy
monitoring.

**4 QUICK-COUPERS
WITH SHUT OFF VALVE**
Allows for quick and
easy one handed
connections and
safe operation.

RUBBER FEET
To reduce vibration
and increase stability.



QUICK PLUG WITH SHUTOFF VALVE
Allow tank to be filled and
disconnected from compressor
without draining itself.

AIR TANK
Stores 10 Gallons
of compressed air.

AIR TANK DRAIN VALVE
For removing moisture from the air tank.



| Model | SAA-110T | | |
|------------------------|----------|-------------------------|--------------------|
| Voltage | / | Quick coupler | 4+1quick plug |
| Frequency | / | Power cord length (ft.) | / |
| Tank size (Gal.)* | 10 | Noise level (2m)**** | / |
| Running HP** | / | Life cycle (Hrs) | / |
| Pressure MAX. (PSI)*** | 225 | Unit size (in.) | 20.3 x 12.8 x 18.1 |
| CFM@90 PSI** | / | Net weight (lbs) | 40.7 |
| CFM@40 PSI** | / | Motor type | / |